


CENTRIFUGAL FANS

P SERIES

Backward curved blades

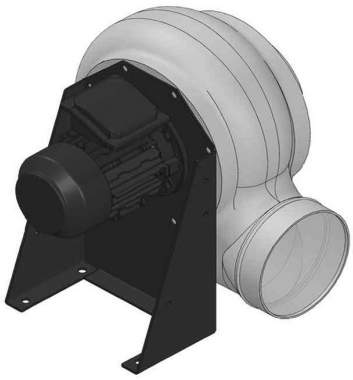

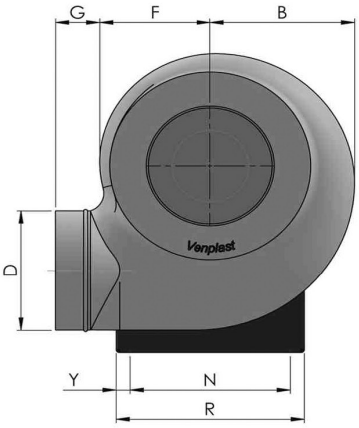

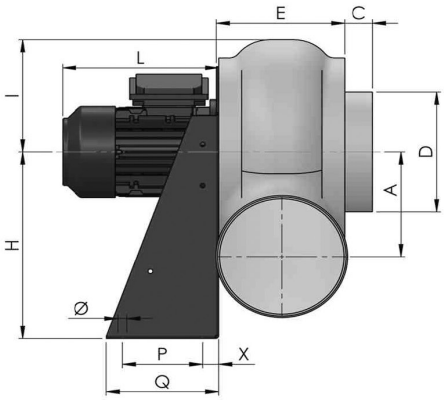

Mod.	Size	KW	rpm	A	B	C	D	E	F	G	H	I	L	N	P	Q	R	Y	X	Ø	kg*	kg**	CODE
202M	63	0.18	2750	140	180	35	160	160	138	55	250	150	195	200	100	140	235	17,5	20	11	9	12	0402550
202T																							0402551
204T	63	0.12	1370	140	180	35	160	160	138	55	250	150	190	200	100	140	235	17,5	20	11	9	12	0402552
204M																							0402553
222M	63	0.25	2800	173	228	35	200	185	170	55	310	190	210	225	100	140	290	17,5	20	11	13	16	0402554
222T																							0402555
224T	63	0.12	1370	173	228	35	200	185	170	55	310	190	190	255	100	140	290	17,5	20	11	10	14	0402556
224M																							0402557
252M	71	0.37	2800	173	228	35	200	185	170	55	310	190	220	255	100	140	290	17,5	20	11	13	15	0402558
252T																							0402559
254T	63	0.12	1370	173	228	35	200	185	170	55	310	190	190	255	100	140	290	17,5	20	11	10	14	0402560
254M																							0402561
282M	80	0.75	2850	208	255	40	225	195	190	70	350	210	240	280	120	190	316	18	35	11	19	21	0402562
282T																							0402563

*Execution with standard motor - **ATEX execution
NB: Mod. M=Single-phase, T=Three-phase

STANDARD VERSION:
PE moulded scroll housing
PP impeller
Motor support in powder coated steel plating
Stainless steel fixings
ATEX VERSION: PE-EL conductive moulded scroll housing

Updated data, technical drawings, connection diagrams, and prices can be found on **www.faet.net**