SUBMERSIBLE MOTOR-DRIVEN PUMPS **SERIES SPV**


SACEMI


Three-phase motor 230/400 V 50Hz
Class F insulation - Protection IP55
Motor body in aluminium and dip tube in polycarbonate



SPV12 - 18

SPV25-33

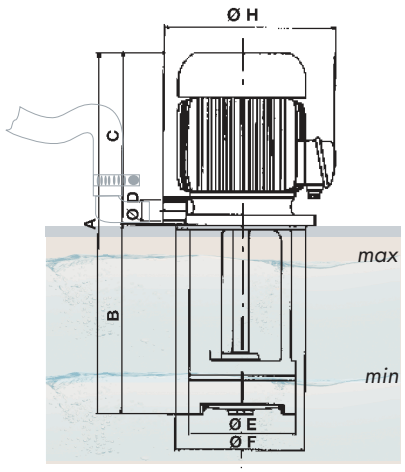



Type	KW	C	ØD gas	ØE	ØF	ØG	H	ØI	ØL	A	B	CODE	€
SPV12	0.15	165	3/4”	98	100	130	151	115	7	255	90	**0501120**	**197.57**
										285	120	**0501121**	
										335	170	**0501122**	
										385	220	**0501123**	
										435	270	**0501124**	**210.89**
										515	350	**0501125**	
SPV 18	0.17	165	3/4”	98	100	130	151	115	7	255	90	**0501126**	**206.16**
										285	120	**0501127**	
										335	170	**0501128**	
										385	220	**0501129**	
										435	270	**0501130**	**219.69**
										515	350	**0501131**	
SPV 25	0.26	210	3/4”	98	100	130	170	115	7	300	90	**0501132**	**334.66**
										330	120	**0501133**	
										380	170	**0501134**	
										430	220	**0501135**	
										480	270	**0501136**	**349.20**
										560	350	**0501137**	

These are suitable for transferring liquids containing impurities of dimensions up to 2-3 mm.
Hydraulic components: impeller, scroll and pump body in PBT mean it can be used with water, emulsions, and oily substances in general with a viscosity not exceeding 3° Engler (21 CST).
The temperature of the liquid must not exceed 10°C.