SUBMERSIBLE MOTOR-DRIVEN PUMPS **SERIES SP**

SACEMI


Motor body in aluminium and dip tube in cast iron
Three-phase motor 230/400V 50Hz
Class F insulation - protection IP 55



SP12 - 18



SP25-33

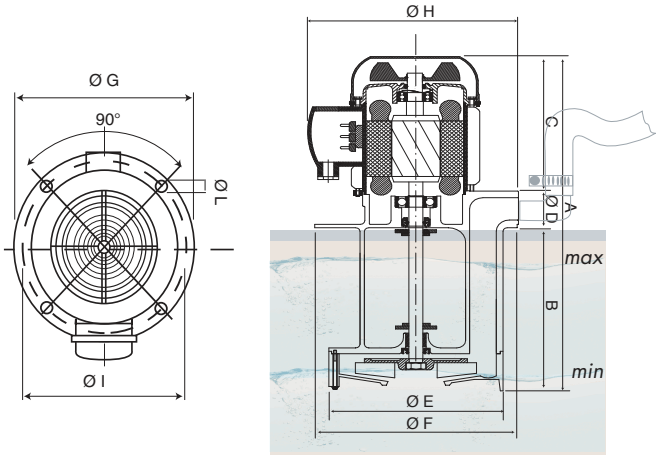

Type	KW	C	ØD gas	ØE	ØF	ØG	H	ØI	ØL	A	B	CODE	€
SP 12	0.15	165	3/4"	98	100	130	151	115	7	265	90	**0501070**	**287.39**
										285	120	**0501071**	
										335	170	**0501072**	
										385	220	**0501073**	
										435	270	**0501074**	**313.85**
										515	350	**0501075**	
SP 18	0.17	165	3/4"	98	100	130	151	115	7	265	90	**0501076**	**304.95**
										285	120	**0501077**	
										335	170	**0501078**	
										385	220	**0501079**	
										435	270	**0501080**	
										515	350	**0501081**	**330.04**
SP 25	0.26	215	3/4"	98	100	130	170	115	7	305	90	**0501082**	**372.00**
										335	120	**0501083**	
										385	170	**0501084**	
										435	220	**0501085**	
										485	270	**0501086**	**446.37**
										565	350	**0501087**	
SP 33	0.36	215	3/4"	98	100	130	170	115	7	305	90	**0501088**	**456.63**
										335	120	**0501089**	
										385	170	**0501090**	
										435	220	**0501091**	
										485	270	**0501092**	**483.31**
										565	350	**0501093**	

These are suitable for transferring liquids containing impurities of dimensions up to 2-3 mm.
Hydraulic components: impeller and scroll in PBT, pump body in cast iron

mean it can be used with water, emulsions, and oily substances in general with a viscosity not exceeding 3° Engler (21 CST).
The temperature of the liquid must not exceed 10°C.