


# MOTORS FOR
# CONVECTION FANS

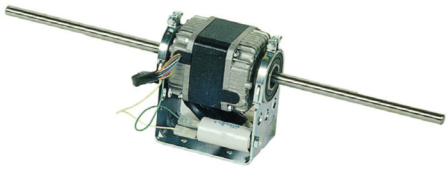

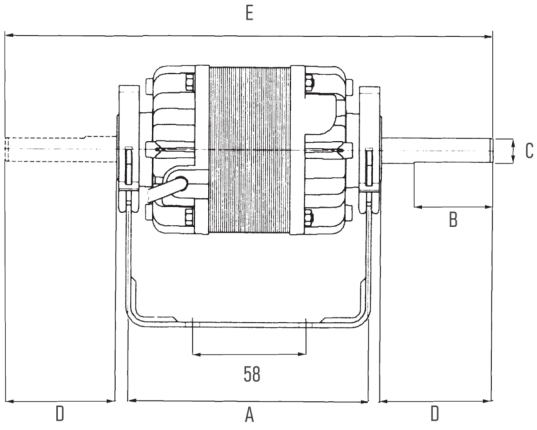

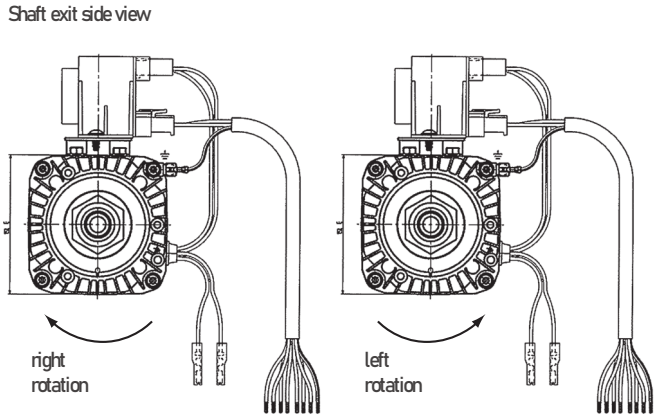


## COMPLETE WITH BRACKET, CLAMPS, CAPACITOR, AND TRANSFORMER WITH REMOVABLE CAP Ø 12,7 MM

| N° SHAFTS | W | V | A | HZ | rpm | µF | A mm | B mm | C* mm | D mm | E mm | ROTAT. | POLES | SPEED | MODEL | CODE |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1 | 25/85 | 230/240 | 0,4 | 50/60 | 1100 | 2 | 99 | 100 | 9,52 | 171 | - | right | 4 | 6 | 3BTM 25-20-A-0/12 | **0402038** |
| 1 | 35/110 | 230/240 | 0,5 | 50/60 | 1100 | 2,5 | 111 | 100 | 9,52 | 172,4 | - | left | 4 | 6 | 3BTM 35-30-A-02 | **0402039** |
| 2 | 20/70 | 230/240 | 0,31 | 50/60 | 1100 | 2 | 99 | 100 | 9,52 | 200 | 510 | | 4 | 6 | 3BTB 20-20-A-0/3 | **0402036** |
| 2 | 35/110 | 230/240 | 0,5 | 50/60 | 1100 | 2,5 | 111 | 100 | 9,52 | 227,2 | 580 | | 4 | 6 | 3BTB 35-30-A-0/3 | **0402037** |
| 2 | 50/135 | 230/240 | 0,4 | 50/60 | 1100 | 3,15 | 119 | 100 | 9,52 | 224,3 | 580 | | 4 | 6 | 3BTB 50-40-6V/1 | **0402043** |
| 2 | 45/155 | 230/240 | 0,71 | 50 | 1100 | 3,15 | 119 | 100 | 9,52 | 208 | 550 | | 4 | 6 | 3BTB 45-40-0 | **0402016** |

CAP* for shaft adaptation
FROM 9,52 TO 12,7 MM

| CODE | € |
|---|---|
| **0402932** | **4,00** |

**ACCESSORY** - CONNECTION CABLE 6-SPEED
suitable for connecting from the fan's transformer or the existing plant's motor. Halves motor installation times because it can be directly connected to the existing electrical plant. Suitable for transforming all types of
single and multi-speed fans/motors
(along with the self-transformer).



| CODE |
|---|
| **0402931** |

**The wiring diagrams can be seen on pages 226-227**