


MOTORS FOR
CONVECTION FANS



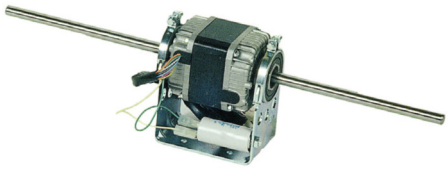

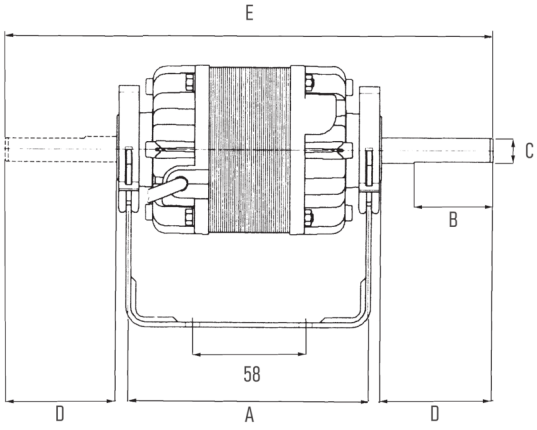

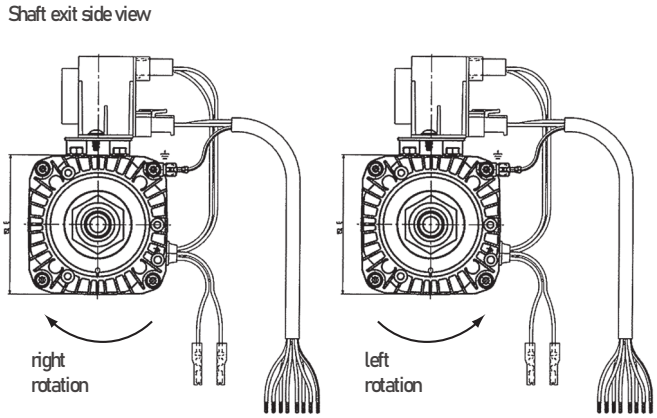

COMPLETE WITH BRACKET, CLAMPS, CAPACITOR, AND TRANSFORMER WITH REMOVABLE CAP Ø 12,7 MM

N° SHAFTS	W	V	A	HZ	rpm	µF	A mm	B mm	C* mm	D mm	E mm	ROTAT.	POLES	SPEED	MODEL	CODE
1	25/85	230/240	0,4	50/60	1100	2	99	100	9,52	171	-	right	4	6	3BTM 25-20-A-0/12	**0402038**
1	35/110	230/240	0,5	50/60	1100	2,5	111	100	9,52	172,4	-	left	4	6	3BTM 35-30-A-02	**0402039**
2	20/70	230/240	0,31	50/60	1100	2	99	100	9,52	200	510		4	6	3BTB 20-20-A-0/3	**0402036**
2	35/110	230/240	0,5	50/60	1100	2,5	111	100	9,52	227,2	580		4	6	3BTB 35-30-A-0/3	**0402037**
2	50/135	230/240	0,4	50/60	1100	3,15	119	100	9,52	224,3	580		4	6	3BTB 50-40-6V/1	**0402043**
2	45/155	230/240	0,71	50	1100	3,15	119	100	9,52	208	550		4	6	3BTB 45-40-0	**0402016**

CAP* for shaft adaptation
FROM 9,52 TO 12,7 MM

CODE	€
0402932	**4,00**

ACCESSORY - CONNECTION CABLE 6-SPEED
suitable for connecting from the fan's transformer or the existing plant's motor. Halves motor installation times because it can be directly connected to the existing electrical plant. Suitable for transforming all types of
single and multi-speed fans/motors
(along with the self-transformer).



CODE
0402931

The wiring diagrams can be seen on pages 226-227